



CHAIR INSTRUCTIONS


Thank you for purchasing a Wine Barrel Workshop Product! Please contact us at orders@winebarrelworkshop.com if you have any questions or issues with your order. Chairs can be maintained with boiled linseed oil or other outdoor coatings of your choice such as teak oil. Regular coatings will keep the wood from drying out and in good shape for many years. The most damaging elements for any wooden furniture piece is direct sun, so a covered patio or shady spot is the ideal outdoor location.

Tools Needed:

Phillips Head Screwdriver / Drill (recommended)

There are 6 parts to the chair:

- 1.) The Seat
- 2.) The Back Seat
- 3.) Right Leg Piece (R)
- 4.) Left Left Piece (L)
- 5.) Right Arm (R)
- 6.) Left Arm (L)

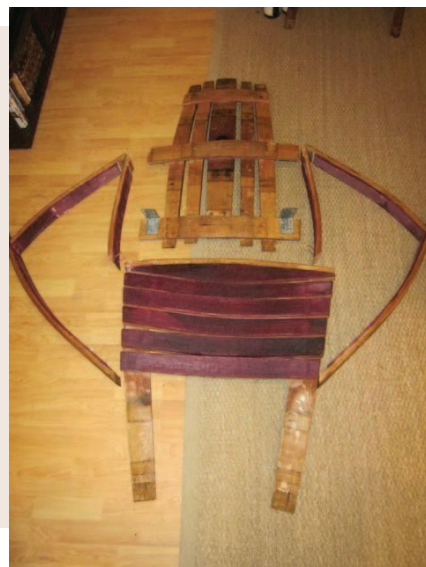

Step 1

Place the back on the seat and match the screw holes with the braces. Use small screws on braces.

Step 2

Attach front legs to the front of seat and screw in 4 long screws.



Step 3:

Screw in the bottom brace part of left to the underside of seat. Make sure brace is secure and tightly attached.



Step 4:

Place arms on top of leg and line up brackets with the back seat of chair and the front left. Use small screws to attach brackets to the seat back and legs.

When Finished your chair should look similar to one of these:

